



Miniature Epoxy Coated Thermistors 0.095" Maximum Body Diameter

U.S. Sensor's miniature leaded epoxy coated thermistors are manufactured using the same state of the art manufacturing techniques as those used to produce U.S. Sensor's precision interchangeable devices. This results in devices with superior long term reliability characteristics especially suitable for temperature measurement, temperature control and temperature compensation applications.



Company Information
[About U. S. Sensor](#)
[Mission Statement](#)
[Newsletter](#)
[Employment Opportunities](#)

Product Guide
[NTC Thermistors](#)
[NTC Probes & Assemblies](#)
[RTD's](#)
[RTD's Probes & Assemblies](#)

Technical Data
[What is a thermistor](#)
[Terminology](#)
[Manufacturing](#)
[Quality](#)

Markets and Applications
[Find a Sales Rep/ Distributor](#)
Contact Us
[Home](#)

U.S. Sensor
1832 W. Collins Ave
Orange, CA 92867
Tel: 800-777-6467
Tel: 714-639-1000
Fax: 714-639-1220
Email: sales@ussensor.com

Features

- Low cost
- High stability
- Epoxy encapsulated
- Small size
- Fast thermal response


Options

- Special lead materials and lengths
- Special encapsulants or probe housings
- Non-standard resistance values and tolerances
- Point matched at specified temperatures


Specifications

- Thermal time constant: 1 second max. in a well stirred oil bath, 10 seconds max. in still air
- Dissipation constant: 1 mW/°C
- Maximum operating temperature: LC series 150°C, KC series 135°C, TC series 150°C (R-T Curve "B" devices limited to 100°C Max.)


"TC" series

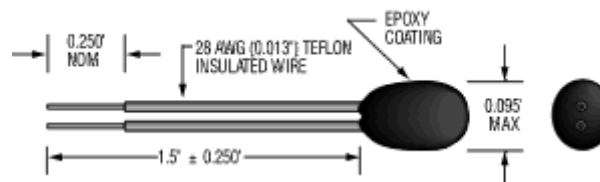



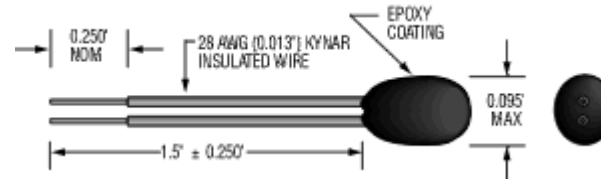



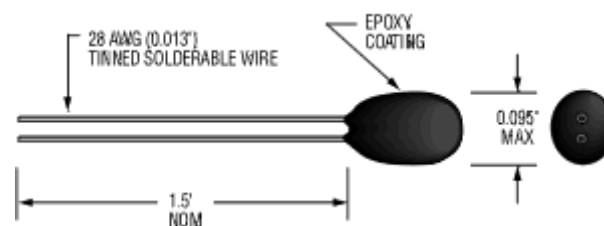




"KC" series














"LC" series














MINIATURE LEADED EPOXY COATED THERMISTORS (150°C, B CURVE 100°C) Teflon - Insulated Leads					
Part Number	Resistance Ohms @25°C	* Resistance Tol. ± %	R-T Curve	Beta (K) 0-50°C	View R-T Chart
TC101B2K	100	10	B	2930	
TC102F2K	1000	10	F	3420	
TC222J2K	2252	10	J	3890	
TC302J2K	3000	10	J	3890	
TC502J2K	5000	10	J	3890	
TC103G2K	10000	10	G	3575	
TC103J2K	10000	10	J	3890	
TC203J2K	20000	10	J	3890	
TC303J2K	30000	10	J	3890	
TC503J2K	50000	10	J	3890	
TC104R2K	100000	10	R	4140	

* Resistance tolerances ± 1%, 2% and 5% are available upon request

MINIATURE LEADED EPOXY COATED THERMISTORS (135°C, B CURVE 100°C) Kynar - Insulated Leads					
Part Number	Resistance Ohms @25°C	* Resistance Tol. ± %	R-T Curve	Beta (K) 0-50°C	View R-T Chart
KC101B2K	100	10	B	2930	
KC102F2K	1000	10	F	3420	
KC222J2K	2252	10	J	3890	
KC302J2K	3000	10	J	3890	
KC502J2K	5000	10	J	3890	
KC103G2K	10000	10	G	3575	
KC103J2K	10000	10	J	3890	
KC203J2K	20000	10	J	3890	
KC303J2K	30000	10	J	3890	
KC503J2K	50000	10	J	3890	
KC104R2K	100000	10	R	4140	

* Resistance tolerances ± 1%, 2% and 5% are available upon request

MINIATURE LEADED EPOXY COATED THERMISTORS (150°C, B CURVE 100°C) Bare Leads					
Part Number	Resistance Ohms @25°C	* Resistance Tol. ± %	R-T Curve	Beta (K) 0-50°C	View R-T Chart
LC101B2K	100	10	B	2930	

LC102F2K	1000	10	F	3420	
LC222J2K	2252	10	J	3890	
LC302J2K	3000	10	J	3890	
LC502J2K	5000	10	J	3890	
LC103G2K	10000	10	G	3575	
LC103J2K	10000	10	J	3890	
LC203J2K	20000	10	J	3890	
LC303J2K	30000	10	J	3890	
LC503J2K	50000	10	J	3890	
LC104R2K	100000	10	R	4140	

* Resistance tolerances \pm 1%, 2% and 5% are available upon request

[« Product Guide](#)

[Top^](#)

[« Previous](#) [Next »](#)