



Thin Film Platinum RTD Probes and Assemblies Threaded

[« Return](#)



Home

Company Information

- [About U. S. Sensor](#)
- [Mission Statement](#)
- [Newsletter](#)
- [Employment Opportunities](#)

Product Guide

- [NTC Thermistors](#)
- [NTC Probes & Assemblies](#)
- [RTD's](#)
- [RTD's Probes & Assemblies](#)

Technical Data

- [What is a thermistor](#)
- [Terminology](#)
- [Manufacturing Quality](#)


Markets and Applications

Find a Sales Rep/ Distributor


Contact Us

Electrical specifications as well as Dimensions "L1", "L2" and "D" are user selectable. Contact U.S. Sensor's [application engineering department](#) to design a probe assembly to best suit your requirements.


H2081 NPT Stainless Steel

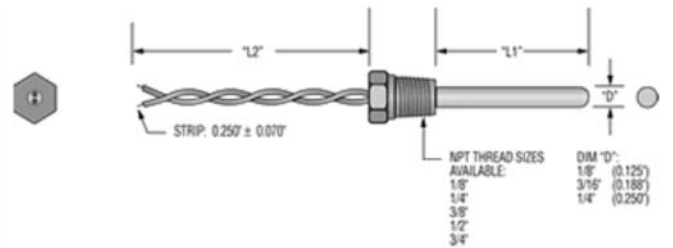

H2998 1/4" NPT Brass

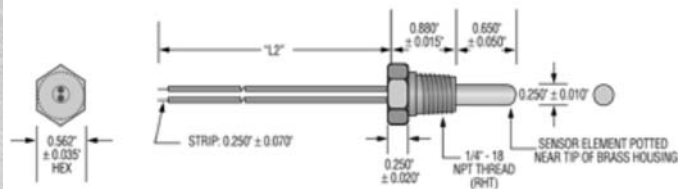


H3475 1/8" NPT Brass

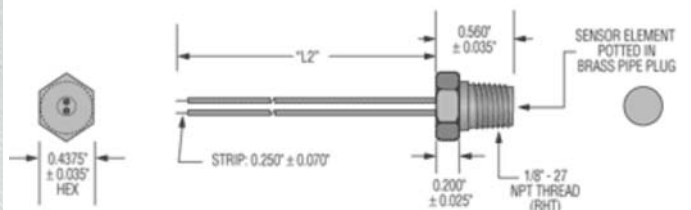


H3476 1/4" NPT Brass


U.S. Sensor
 1832 W. Collins Ave
 Orange, CA 92867
 Tel: 800-777-6467
 Tel: 714-639-1000
 Fax: 714-639-1220
 Email: sales@ussensor.com

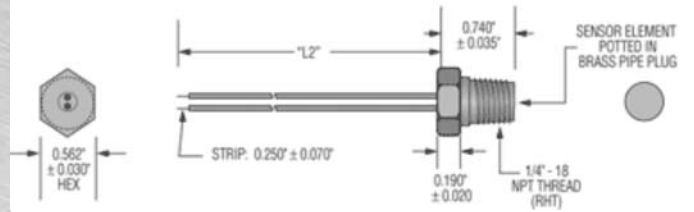


H6244 S/S, 1/2"-13 Straight Thread

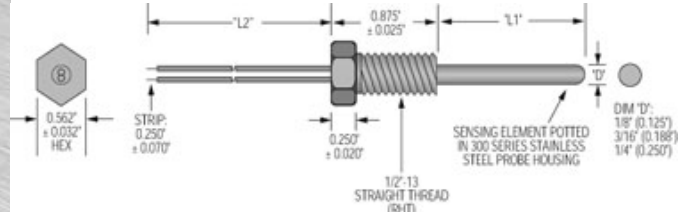


H6246 S/S, 3/4"-16 Straight Thread

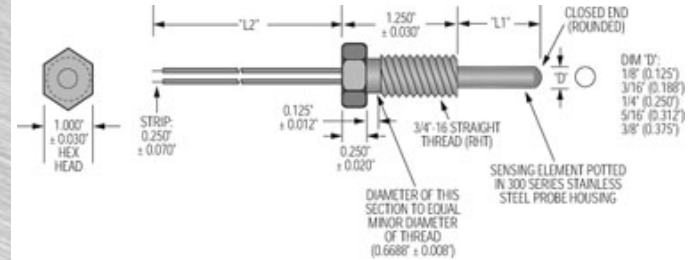


H7202 S/S Double NPT, 1/4"-18 Thread

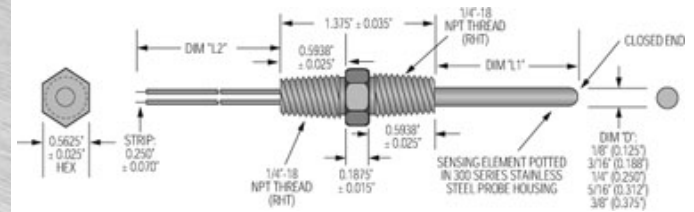



H7229 Hex Bolt, 3/8"-16 Thread, High Temperature

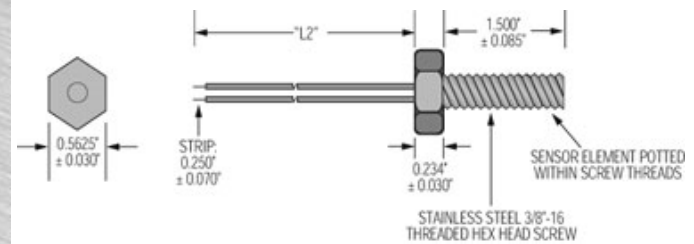

H7233 Hex Bolt, 1/4"-20 Thread

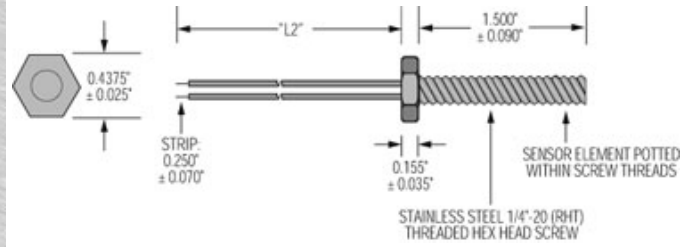

H6281 Stainless Steel Probe with Reversed Straight Thread Fitting

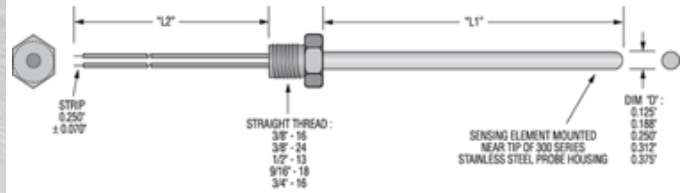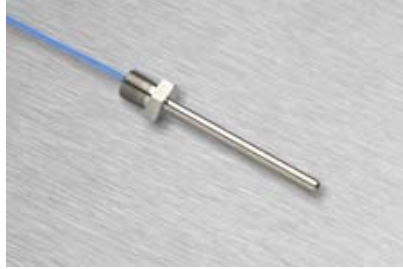

[Sitemap](#)

[Top ^](#)

[« Return](#)